


The Most Trusted Name in Pumps and Meters

| Motor                                      |   |
|--|---|
| Power -AC 115, 230, 115/230                | 115   |
| HZ 50, 60, 50/60                           | 60  |
| Power - DC 12, 24, 12/24                   | None  |
| HP (horsepower) rating                     | 1/3   |
| Power cord length                          | None  |
| Power cord gauge                           | None  |
| Power cord DC battery connectors           | None  |
| Amps (FLA)                                 | 5.5   |
| RPM  | 1725  |
| Duty cycle                                 | 30 min.   |
| Thermal protection switch                  | Y   |
| Circuit protection fuse                    | NONE  |
| Certification                              | UL, cUL   |
| Pump                                       |   |
| Type- rotary, diaphragm, gear, vane        | Rotary Vane   |
| GPM in supplied configuration              | 21.4  |
| GPM open flow - no hose or nozzle          | 21.4  |
| By-pass pressure rating (psi) - Max        | 23  |
| Dry vac (in Hg)                            | 12  |
| Head- Max                                  | 53.13   |
| Anti-siphon valve                          | Anti-siphon Ready                                     |
| Inlet - Size / Thread                      | 1 ¼"  |
| Outlet – Size / Thread                     | NPT   |
| Mount                                      | Bung (NPT)  |
| Materials of construction -pump housing    | Cast Iron   |
| Materials of construction- wetted material | Buna  |
| Rotor materials of construction            | 80% Iron/20% Copper                                   |
| Rotor vane material of construction        | Carbon  |
| Compatible fluids                          | Diesel, Gasoline, Bio-Diesel up to B20, E15, Kerosene |
| Strainer mesh size                         | 40 x 40 x .010"                                       |
| Warranty                                   | Limited Lifetime Warranty†                            |
| Accessories                                |   |
| Suction pipe material                      | None  |
| Suction pipe length- extended/not extended | None  |
| Nozzle- size                               | N/A   |
| Nozzle- manual / automatic                 | N/A   |
| Hose liquid materials compatibility        | N/A   |
| Hose diameter                              | N/A   |
| Hose length                                | N/A   |
| Hose static wire (Y/N)                     | N/A   |
| Logistics                                  |   |
| UPC  | 89404211908   |
| Length                                     | 0   |
| Width                                      | 0   |
| Height                                     | 0   |



**FR700VN**

| SKU/Kit #'s | Small Pump Kits | Consists of  |
|-------------|-----------------|--|
| KIT700BD    | Bio-Diesel      | Special Shaft Seal Assembly, Gasket, Inlet Gasket, Bypass O-ring |
| KIT700BV    | Bypass          | Poppet, Spring, O-ring, Cap                                      |
| KIT700CV    | Check Valve     | Bypass Valve, Ring, Gaskets, Spring, Check Valve Body            |
| KIT700SL    | Shaft Seal      | 8 Piece Assembly   |
| KIT700RG    | Rotary Group    | Rotor, 8 Vanes, Rotor Key, Gasket, Rotor Cover, 4 Screws         |
| KIT700BG    | Inlet           | Inlet, 4 Screws, J-Box Cover, Label, Gasket, 4 Screws            |
| KIT700OT    | Screen & Gasket | Screen, Gasket   |
| KIT700RG    | Nozzle Boot     | Nozzle Boot, 2 Screws, (Small Pumps and 700 Series Pumps)        |
| KIT700SG    | Screen & Gasket | Strainer, Gasket, Strainer Cover                                 |
| KIT700SW    | Switch Lever    | Switch Lever, Nut  |

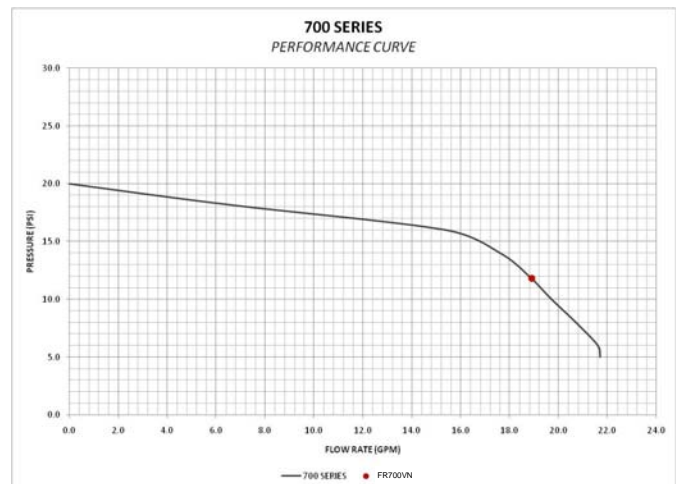

**Tuthill Transfer Systems**  
 8825 Aviation Drive  
 Fort Wayne, IN 46809  
 (800) 634-2695  
 www.tuthill.com

†Warranty details can be found at fillrite.com